



**CLASS "MISC" MIDGET FUSES
FAST-ACTING**



**Catalog No. MCL (.1 - 50A)
600 Volts AC or Less
Fast-Acting**

AMPERE RATINGS				
MCL 600V				
0.1	0.75	3.5	9	30
0.125	1	4	10	35
0.2	1.5	5	12	40
0.25	2	6	15	50
0.3	2.5	7	20	—
0.5	3	8	25	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.1 - 50	13/32	1-1/2

MCL SPECIFICATIONS
Fast-Acting

Voltage Rating: MCL - 600VAC

Ampere Rating: .1 - 50 Amps

Interrupting Rating: 100K RMS Amps

Agency Approvals:
(.1 - 30) UL Listed to 198G, File E162443
(.1 - 30) CSA Cert. C22.2 Part 59.2, LR700489

- BENEFITS:**
- Compact dimensions.
 - High interrupting rating.
 - Fast-acting design responds quickly to both overloads and short-circuit current.

- APPLICATIONS:**
- Street lighting holders, HID lighting, control circuits, electronic equipment protection.

RECOMMENDED FUSEBLOCKS:
Refer to page 142 in this catalog.

CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
MCL	KTK	ATM	KLK



**Catalog No. MOL (.5 - 30A)
250 Volts AC or Less
Fast-Acting**

AMPERE RATINGS				
MOL 250V				
0.5	2.5	6	10	25
1	3	6.5	12	30
1.5	4	8	15	—
2	5	9	20	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.5 - 30	13/32	1-1/2

MOL SPECIFICATIONS
Fast-Acting

Voltage Rating: MOL - 250VAC

Ampere Rating: .5 - 30 Amps

Interrupting Rating: 10K RMS Amps

Agency Approvals:
(.5 - 30) UL Listed to 198G, File E162443
(.5 - 30) CSA Cert. C22.2 Part 59.2, LR700489

- BENEFITS:**
- Compact dimensions.
 - Economical laminated paper tube design.

- APPLICATIONS:**
- Supplemental protection for non-inductive control and lighting circuits.

RECOMMENDED FUSEBLOCKS:
Refer to page 142 in this catalog.

CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
MOL	BAF	OTM	BLF



**Catalog No. EBS (.2 - 10A)
.2 - 5A 600 Volts AC or Less
6 - 10A 250 Volts AC or Less
Fast-Acting**

AMPERE RATINGS				
EBS (AMP)				
0.2	0.8	1.8	5	10
0.4	1	2	6	—
0.5	1.5	3	7	—
0.75	1.6	4	8	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.2 - 10	13/32	1-3/8

EBS SPECIFICATIONS
Fast-Acting

Voltage Rating: .2-5 Amps; 600VAC
5-10 Amps; 250VAC

Ampere Rating: .2 - 10 Amps

Interrupting Rating: 10K RMS Amps

Agency Approvals:
UL Listed to 198G, File E162443
CSA Cert. C22.2 Part 59.2, LR700489

- BENEFITS:**
- Compact dimensions.
 - Shorter than standard midget dimensions.
 - Economical design.

- APPLICATIONS:**
- Supplemental protection for non-inductive control and lighting circuits.


CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
EBS	BBS	None	BLS




CLASS "MISC" MIDGET FUSES FAST-ACTING

AVERAGE TIME/CURRENT CURVE

Cat. No. MCL (Amp) 600V

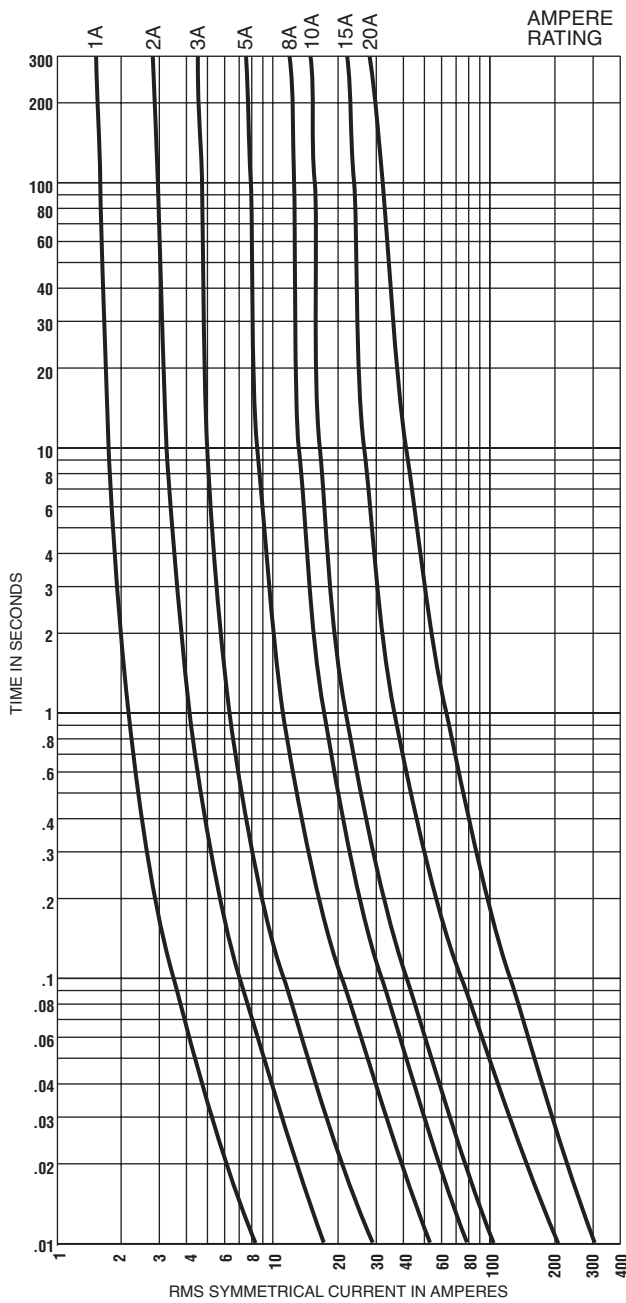

Cat. No. MOL (Amp) 250V

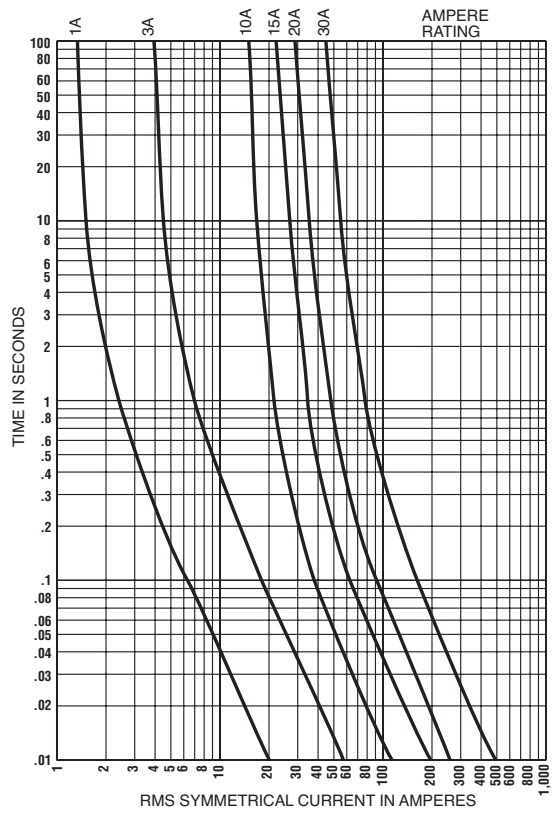

Cat. No. EBS (Amp) 600V

