



**CLASS "MISC" MIDGET FUSES
TIME-DELAY**



**Catalog No. MEQ (.1 - 30A)
500 Volts AC or Less
Time-Delay**

AMPERE RATINGS				
MEQ 500V				
0.1	0.6	2.25	5.6	15
0.125	0.8	2.5	6	20
0.15	1	3	6.25	25
0.2	1.125	3.2	7	30
0.25	1.25	3.5	8	—
0.3	1.5	4	9	—
0.4	1.6	4.5	10	—
0.5	2	5	12	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.1 - 30	13/32	1-1/2

MEQ SPECIFICATIONS
Time-Delay

Voltage Rating: MEQ - 500VAC
Ampere Rating: .1 - 30 Amps
Interrupting Rating: 10K RMS Amps
Agency Approvals:
 (.1 - 30) UL Listed to 198G, File E162443
 (.1 - 30) CSA Cert. C22.2 Part 59.2, LR700489

BENEFITS:

- Compact dimensions.
- Fiber tube construction.
- Time-delay allows harmless inductive surges to pass without needless fuse opening.

APPLICATIONS:

- Supplemental protection of transformers, solenoids, and other high inrush circuits.
- For motor applications, refer to EDCC.

RECOMMENDED FUSEBLOCKS:
Refer to page 142 in this catalog.

CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
MEQ	FNQ	ATQ	FLQ



**Catalog No. MEN (.1 - 30A)
250 Volts AC or Less
Time-Delay**

AMPERE RATINGS				
MEN 250V				
0.1	0.8	2	4.5	10
0.15	1	2.25	5	12
0.2	1.125	2.5	5.6	15
0.25	1.25	2.8	6	20
0.3	1.4	3	6.25	25
0.4	1.5	3.2	7	30
0.5	1.6	3.5	8	—
0.6	1.8	4	9	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.5 - 30	13/32	1-1/2

MEN SPECIFICATIONS
Time-Delay

Voltage Rating: MEN - 250VAC
Ampere Rating: .5 - 30 Amps
Interrupting Rating: 10K RMS Amps @ 125V
Agency Approvals:
 UL Listed to 198G, File E162443
 CSA Cert. C22.2 Part 59.2, LR700489

BENEFITS:

- Compact dimensions.
- Fiber tube construction.
- Dual-element construction allows harmless inductive surges to pass without opening.

APPLICATIONS:

- Supplemental protection of small motors, transformers, solenoids, and other high inrush power electronic circuits.

RECOMMENDED FUSEBLOCKS:
Refer to page 142 in this catalog.

CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
MEN	FNM	TRM	FLM



**Catalog No. MID (.1 - 30A)
.1 - .8A 250 Volts AC or Less
1 - 15A 125 Volts AC or Less
20 - 30A 32 Volts AC or Less
Pin Indicating - Time-Delay**

AMPERE RATINGS				
0.1	1	2.25	5.6	15
0.15	1.125	2.5	6	20
0.2	1.25	2.8	6.25	25
0.3	1.4	3	7	30
0.4	1.5	3.2	8	—
0.5	1.6	3.5	9	—
0.6	1.8	4	10	—
0.8	2	5	12	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.1 - 30	13/32	1-1/2

NOTE: 12-30 amp is dual-tube construction.
MID SPECIFICATIONS
Pin Indicating — Time-Delay

Voltage Rating: .1 - .8 Amps; 250VAC
 1 - 15 Amps; 125VAC
 20 - 30 Amps; 32VAC
Ampere Rating: .1 - 30 Amps
Interrupting Rating: 10K RMS Amps @ 125V

Agency Approvals:
 UL Listed to 198G, File E162443
 CSA Cert. C22.2 Part 59.2, LR700489

BENEFITS:

- Compact dimensions.
- Silver-plated pin indicates when fuse is opened. Provides positive electrical signal activation.

APPLICATIONS:

- Supplemental protection for high inrush power electronic circuits.

RECOMMENDED FUSEBLOCKS:
Refer to page 142 in this catalog.


CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
MID	FNA	GFN	FLA




**CLASS "MISC" MIDGET FUSES
TIME-DELAY**

AVERAGE TIME/CURRENT CURVE

Cat. No. MEQ (Amp)

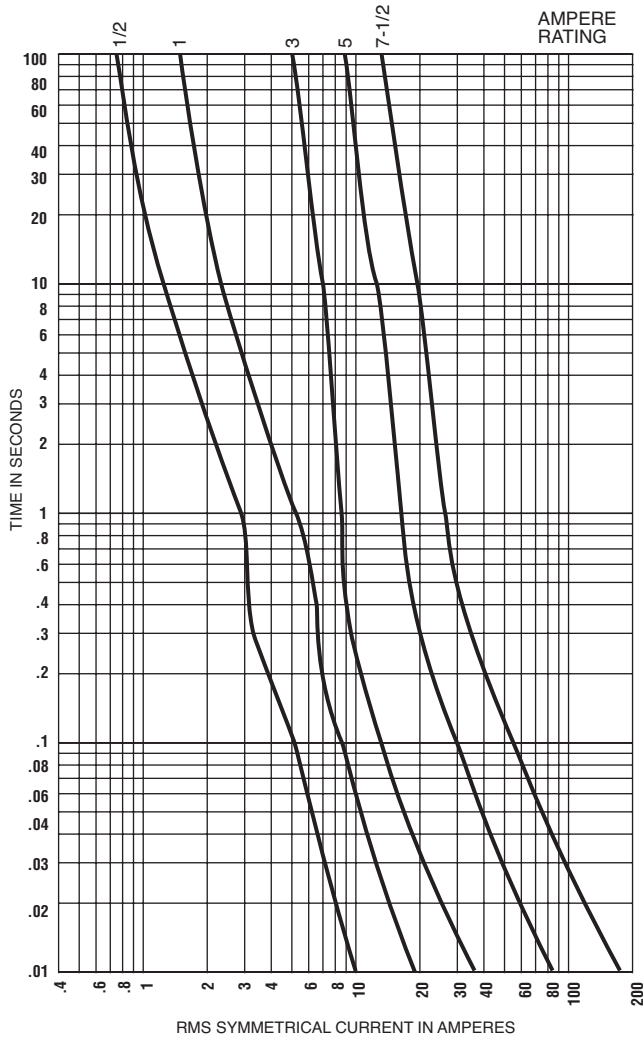

Cat. No. MEN (Amp)

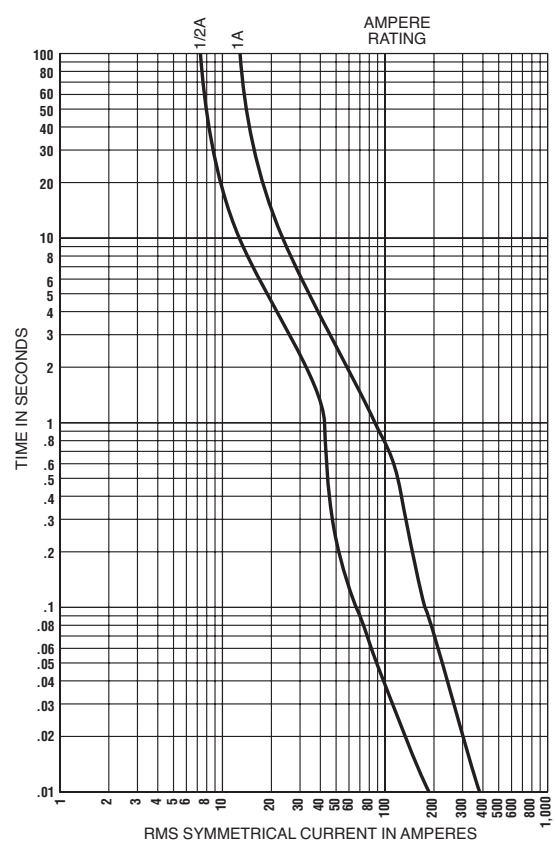

Cat. No. MID (Amp)

