OA172SAPL Series

172 x 150 x 38mm
(6.7"x 5.9"x 1.5")

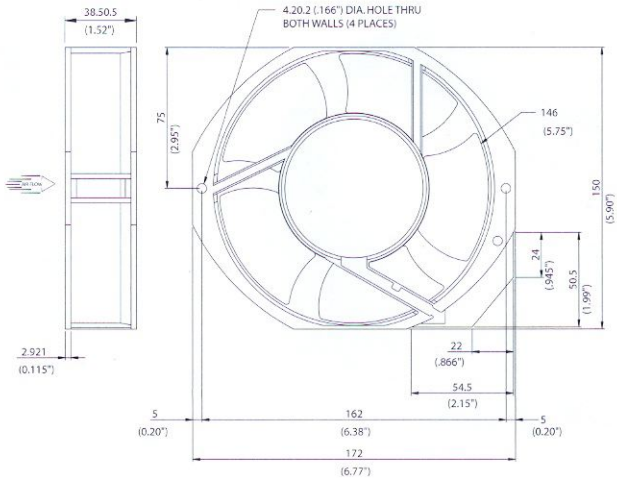

Frame	Diecast Aluminum
Impeller	PBT, UL94V-O plastic
Connection	2x Lead Wires or Terminals
Motor	Capacitor drive, thermally protected
Bearing System	Dual ball
Insulation Resistance	>100M ohm between lead-wire and frame (500VDC)
Dielectric Strength	1 min at 1500 VAC, 50/60Hz

Operating Temperature
Ball Bearing
-20C ~ +80C

Life Expectancy
Ball Bearing
60,000 hours (L10 at 40C)

m2

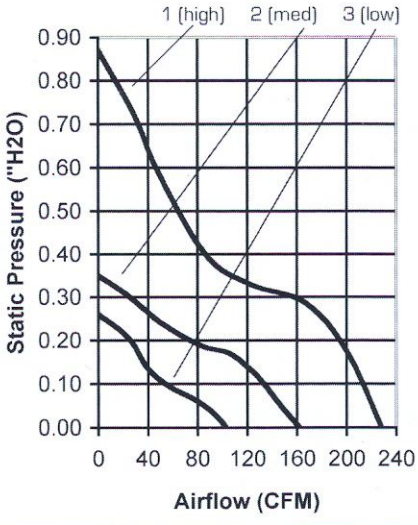

Model Number	Speed (RPM)	Airflow (CFM)	Noise (dB)	Volts AC	Voltage Range	Watts	Max. Static Pressure ("H2O)
OA172SAPL-11-1 *	3400	228	58	115	103~126	28	0.87
OA172SAPL-11-2 *	2750	162	50	115	103~126	27	0.35
OA172SAPL-11-3 *	1700	103	44	115	103~126	26	0.26
OA172SAPL-22-1 *	3400	228	58	230	160~260	28	0.87
OA172SAPL-22-3 *	1700	103	44	230	160~260	26	0.26

** Indicate "TB" (Terminal Ball Bearing), "WB" (12" Wire Leads, Ball Bearing)*