

Easy Design™ Speakers



CS1EZ Ceiling Speaker

Bogen's CS1EZ is a pre-assembled ceiling speaker comprised of an 8" cone speaker and steel ceiling grille painted with white enamel. The CS1EZ includes a volume control knob and rear-mounted screw terminal board for easier electrical connection.

Product Features:

- 1-watt single-tap design
- Screw terminal connections for fast installation
- Designed for 70V amplifier output
- 8" cone speaker for excellent audio quality
- Heavy-duty, wire-wound volume control with knob
- 50 Hz-12 kHz frequency response
- 95 dBspl @ 4ft./1W input

Dimensions	Shipping Weight (6/carton)
13" Dia. x 3-1/4" D	28 lb. / carton

HS7EZ, HS15EZ, HS30EZ Horn Loudspeakers

Bogen's Easy Design line of horn loudspeakers are made of weatherproof all-metal construction, thereby making them ideal for both indoor and outdoor use in industrial plants, warehouses, schools, construction sites, and recreational areas. All models come with swivel and tilt mounting bases for greater flexibility in setting the angle of projection.

Product Features:

- 7.5, 15, and 30 watt models
- Single-tap design
- HS7EZ features 12" lead wire for electrical connections
- HS15EZ and HS30EZ feature screw terminal connections for fast installation
- Designed for 70V amplifier outputs
- Weatherproof design
- Stepped attenuator volume control
- Swivel and tilt mounting base for flexibility in coverage
- Textured mocha enamel



HS15EZ



HS7EZ



HS30EZ

Model	Frequency	Sensitivity	Dispersion	Dimensions	Shipping Weight
HS7EZ	250 Hz - 14 kHz	105 dBspl (4ft./7.5W) input (@1 kHz)	120°	6" Dia. x 4" D	2 lb.
HS15EZ	275 Hz - 14 kHz	121 dBspl (4ft./15W) input (@1 kHz)	110°	9" Dia. x 9-1/4" D	5 lb.
HS30EZ	225 Hz - 14 kHz	125 dBspl (4ft./30W) input (@1 kHz)	100°	11" Dia. x 10-1/2" D	7 lb.


WB1EZ Wall Baffle Speaker

The WB1EZ comes pre-assembled with an 8" cone speaker enclosed in a simulated walnut-finished wooden enclosure with a black grille cloth on front and a recessed volume control.

Product Features:

- 1-watt single-tap design
- Screw terminal connections for fast installation
- Designed for 70V amplifier output
- 8" cone speaker for excellent audio quality
- Recessed volume control
- Designed for easy wall-mount installation
- 50 Hz-12 kHz frequency response
- 95 dBspl @ 4ft./1W input sensitivity

Dimensions	Shipping Weight (4/carton)
9-1/2" W x 9-1/2" H x 5-1/4" D (3-1/4" D @ bottom)	19 lb. / carton

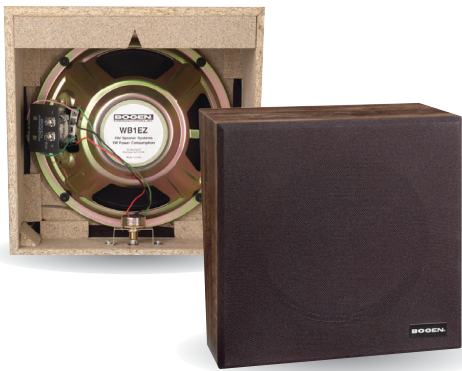

Accessories



AT10A
10W
Attenuator



AT35A
35W
Attenuator



BC1
Beam Clamp
(for HS-EZs)



TB8
Tile Bridge
(for CS1EZ)



RE84
Ceiling Enclosure
(for CS1EZ)



MR8
Mounting Ring
(for CS1EZ)